



EXPORT section


Address : 3rd floor, No.523, Asseman Tower, Farmanye Junction, Pasdaran Ave., Tehran - Iran

Phone : (0098) (21) 26100425-6 // Fax : (0098) (21) 26100429

PROPANE

PRODUCT TEST

<u>TEST</u>	<u>ASTM METHOD</u>	<u>RESULTS</u>
1- ETHANE & LIGHTER (MOLE %) MAX.	D-2163	3
2- PROPANE (MOLE %) MIN.	D-2163	95
3-TOTAL BUTANE & HEAVIER (MOLE %) MAX.D-2163	D-2163	3
4-SPECIFIC GRAVITY AT $\frac{60}{60}$ °F MAX.	D-2598	0.510
5-COPPER CORROSION	D-1838	1-A
6-VAPOUR PRESSURE (PSIG) @ 100 °F MAX.	D-2598	200
7-HYDROGEN SULPHIDE (PPM) MAX.	D-2420	NEGATIVE
8-TOTAL SULPHUR (PPM) MAX.	D-6667	30

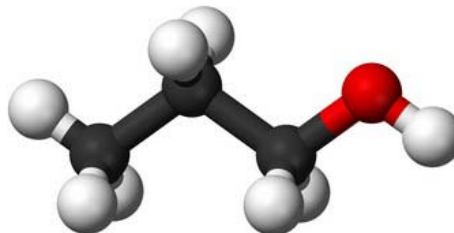

BUTANE

PRODUCT TEST

<u>TEST</u>	<u>METHOD ASTM</u>	<u>RESULTS</u>
1- PROPANE & LIGHTER (MOLE %) MAX	D-2163	4
2-TOTAL BUTANE (MOLE %) MIN	D-2163	94
3-TOTAL PENTANE & HEAVIER (MOLE %) MAX	D-2163	2
4-SPECIFIC GRAVITY @ $\frac{60}{60}$ °F MAX	D-2598	0-585
5 - CORROSION NUMBER	D-1838	1-A
6 - VAPOUR PRESSURE (PSIG) @ 100 °F MAX	D-2598	50
7 - HYDROGEN SULFIDE	D-2420	NEGATIVE
8 - TOTAL SULPHUR (WT PPM) MAX	D-6667	30
9 - NON VOLATILE RESIDUE VOL% MAX	D-2158	0.1

